



# 22M

eTile

## Best Suited For

Small Business, Enterprise, Signage & Digital Media, Retail & Finance

## Specifications

Panel Size	21.5"
Dimension (Set)	499.4 x 296.3 x 35.7 mm
Dimension (Package)	646 x 220 x 483 mm
Slim Bezel	L/R: 10.9 mm; T/B: 13.6 mm
Weight (Gross\Net)	4.2 kg
Display Orientation	Landscape \ Portrait
Mounting	Wall mount (VESA FDMI) 100 x 100 mm; 75 x 75 mm

## LCD Panel

Resolution	1920 x 1080
VA (Vertical Alignment) Panel with back LED design	
Brightness	250 nits
View Angle	150 (min) / 178 (max)
Active Area/ Ratio	476.64 (H) x 268.11 (V); 16:9
Response Time (Average)	16 ms

## Touch Screen (Optional)

None

## Humidity

90% R.H max

## Features

- + Low Power Consumption: 22.4W max
- + OSD LCD keypad hot keys settings with key lock feature
- + Built in internal 2W L/R speakers
- + RS232 protocol supporting remote management feature for remote power on/off control, contrast/ brightness control

## I/O Port

- DC inlet x 1
- DVI-I in x 1
- D-sub (VGA) in x 1
- RS232 in x 1 (reserve)

## AC Input \ Output

AC Input	100~240VAC; 120W Max
DC Output	19V/ 3.4A

## Temperature

Operating	0 to 50 °C
Storage	-20 to 60 °C

Instore signage. In four easy steps.



Choose your  
screens



Choose your  
designs




Populate  
& publish



Measure  
the results

Screeners™

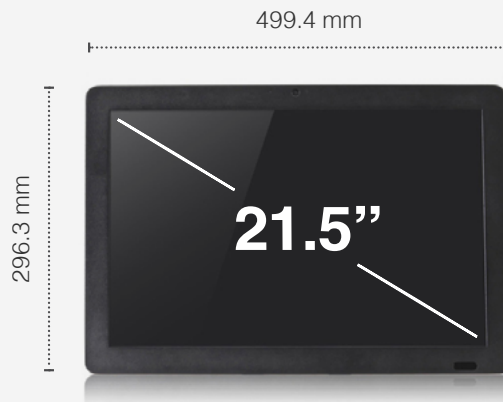

The specifications depicted may be subject to change without prior notice.  
All trademarks are copyright of their respective owners. © AOPEN Inc.

[www.screener.digital](http://www.screener.digital)